


How to read our Model Numbers and Specifications

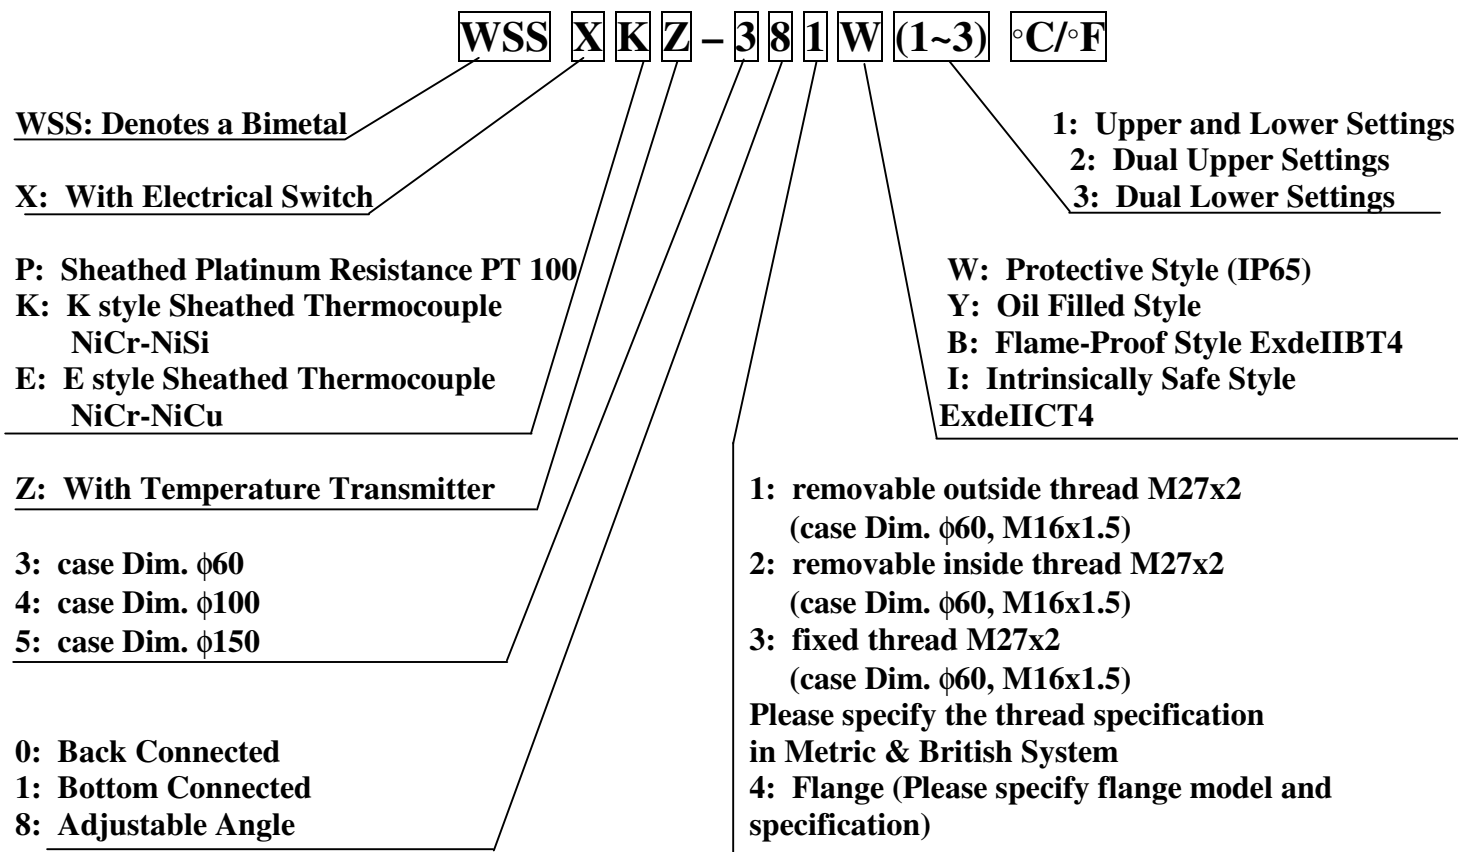

Specification

Installation Connection Type	Case Material	Temperature		Insert Length l (mm)	Protective Thermowell	
		Measure Range	Graduation		Nominal Diameter (mm)	Material
"The case thread is φ60, M16x1.5, the Metric and British System are also available. Please specify the thread specification. The case thread is φ100, φ150 M27x2, the Metric and British System are also available. Please specify the thread specification. Flange Connection: Please specify the flange model, specification, and material.	Aluminum alloy case with electrostatic spray plastic for gauge with electrical switch and explosion proof gauge with electrical switch. SS case and aluminum alloy case with electrostatic spray plastic for other products.	-80-40	2	75	6 x 1.5	Stainless Steel 12Mo2Ti, Pure Titanium, Hastelloy C Painting PTFE Others
		-40-80	2	100	8 x 1	
		-20-100	2	150	10 x 1	
		0-50	1	200	10 x 2	
		0-100	2	250	12 x 1	
		0-150	2	300	12 x 1.5	
		0-200	5	400	12 x 2	
		0-300	5	500	14 x 2	
		0-400	10	750		
		0-500	10	1000		
			1250			
			1500			
			2000			