

BIMETAL THERMOMETERS ADJUSTABLE ANGLE

WSS-W CORE EXTRACTABLE PROTECTIVE BIMETAL THERMOMETER

Dial Diameter of 2.4" (60 mm)

Thread M16x1.5

WSS-381W: removable outside thread

WSS-382W: removable inside thread

WSS-383W: fixed thread

Flange

WSS-384W: flange, please identify

Dial Diameter of 3.9" (100 mm)

Thread M27x2

WSS-481W: removable outside thread

WSS-482W: removable inside thread

WSS-483W: fixed thread

Flange

WSS-484W: flange, please identify

Dial Diameter of 5.9" (150 mm)

Thread M27x2


WSS-581W: removable outside thread

WSS-582W: removable inside thread

WSS-583W: fixed thread

Flange

WSS-584W: flange, please identify

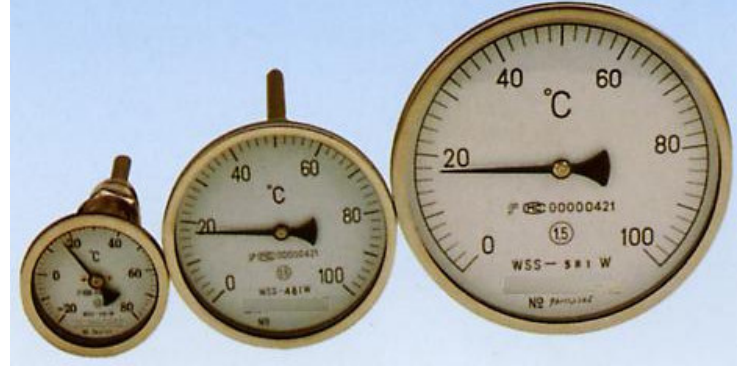

WSS-Y OIL-FILLED CORE EXTRACTABLE PROTECTIVE BIMETAL THERMOMETER

Dial Diameter of 2.4" (60 mm)

Thread M16x1.5

WSS-381Y: removable outside thread

WSS-382Y: removable inside thread

WSS-383Y: fixed thread

Flange

WSS-384Y: flange, please identify

Dial Diameter of 3.9" (100 mm)

Thread M27x2

WSS-481Y: removable outside thread

WSS-482Y: removable inside thread

WSS-483Y: fixed thread

Flange

WSS-484Y: flange, please identify

Dial Diameter of 5.9" (150 mm)

Thread M27x2

WSS-581Y: removable outside thread

WSS-582Y: removable inside thread

WSS-583Y: fixed thread

Flange

WSS-584Y: flange, please identify

BIMETAL THERMOMETERS ADJUSTABLE ANGLE

WSSP-W CORE EXTRACTABLE BIMETAL RTD INTEGRAL THERMOMETER

Dial Diameter of 2.4" (60 mm)

Thread M16x1.5

WSSP-381W: removable outside thread

WSSP-382W: removable inside thread

WSSP-383W: fixed thread

Flange

WSSP-384W: flange, please identify

Dial Diameter of 3.9" (100 mm)

Thread M27x2

WSSP-481W: removable outside thread

WSSP-482W: removable inside thread

WSSP-483W: fixed thread

Flange

WSSP-484W: flange, please identify

Dial Diameter of 5.9" (150 mm)

Thread M27x2


WSSP-581W: removable outside thread

WSSP-582W: removable inside thread

WSSP-583W: fixed thread

Flange

WSSP-584W: flange, please identify

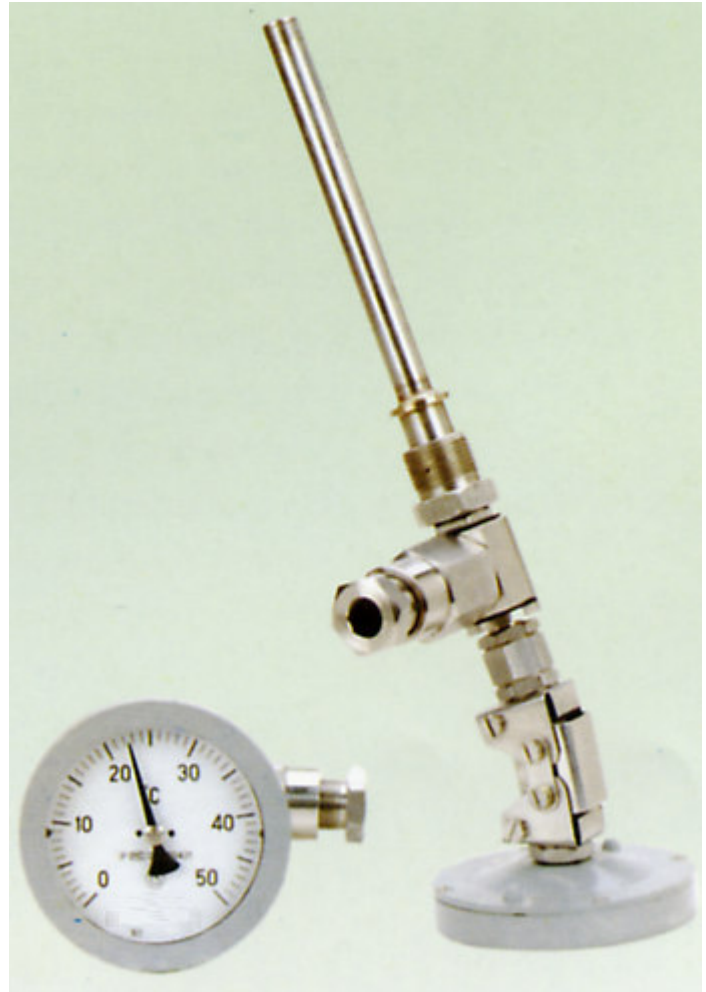

WSSK(E)Z -W CORE EXTRACTABLE BIMETAL THERMOCOUPLE INTEGRAL THERMOMETER

K: With K styled sheathed thermocouple NiCr-NiSi

E: With E styled sheathed thermocouple NiCr-NiCu

Dial Diameter of 2.4" (60 mm)

Thread M16x1.5

WSSK(E) -381W: removable outside thread

WSSK(E) -382W: removable inside thread

WSSK(E) -383W: fixed thread

Flange

WSSK(E)-384W: flange, please identify

Dial Diameter of 3.9" (100 mm)

Thread M27x2

WSSK(E)-481W: removable outside thread

WSSK(E)-482W: removable inside thread

WSSK(E)-483W: fixed thread Flange

WSSK(E)-484W: flange, please identify

Dial Diameter of 5.9" (150 mm)

Thread M27x2

WSSK(E)-581W: removable outside thread

WSSK(E)-582W: removable inside thread

WSSK(E)-583W: fixed thread

Flange

WSSK(E)-584W: flange, please identify