

**EXPLOSION - PROOF GEAR STYLE TEMPERATURE TRANSMITTERS WITH
ELECTRO SWITCH
TYPE: ADJUSTABLE ANGLE**


(If it is intrinsically safe type, the symbol is "i", that is WSSX-i.)

**WSSXPZ -B EXPLOSION-PROOF BIMETAL
RTD INTEGRAL TEMPERATURE
TRANSMITTER WITH ELECTRICAL SWITCH**

Dial Diameter of 2.36" (60 mm)
Thread M16x1.5

(1-3) indicates with:
1. Upper & Lower Setting
2. Dual Upper Limit Setting
3. Dual Lower Limit Setting
Please specify when ordering.

WSSXPZ-481B(1-3): removable outside thread
WSSXPZ-482B(1-3): removable inside thread
WSSXPZ-483B(1-3): fixed thread
Flange
WSSXPZ-484B(1-3): flange, please identify

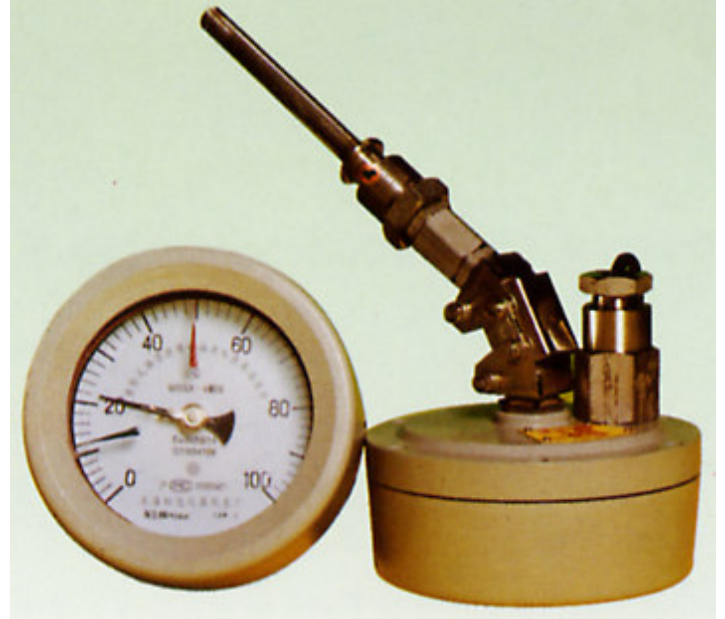

**WSSXK(E)Z -B EXPLOSION-PROOF BIMETAL
THERMOCOUPLE INTEGRAL
TEMPERATURE TRANSMITTER WITH
ELECTRICAL SWITCH**

Dial Diameter of 2.36" (60 mm)
Thread M16x1.5

(1-3) indicates with:
1. Upper & Lower Setting
2. Dual Upper Limit Setting
3. Dual Lower Limit Setting
Please specify when ordering.

WSSXK(E)Z-481B(1-3): removable outside thread
WSSXK(E)Z-482B(1-3): removable inside thread
WSSXK(E)Z-483B(1-3): fixed thread
Flange
WSSXK(E)Z-484B(1-3): flange, please identify

